

**MEGA  
STONE  
COLLECTION**  
BY COREtec®

**COREtec®**

*the Original*

# MEGA STONE COLLECTION


BY COREtec®

## DESIGNS

WEAR LAYER


CORE  
no expansion

CORK  
underlay

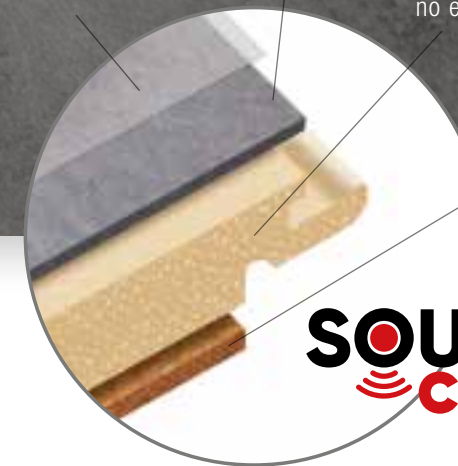

**SOUND  
core** BY COREtec®

10  
designs



all  
with **4 V-GROOVE**

8 mm

Total thickness / Epaisseur totale  
Gesamtstärke / Totale dikte  
Espesor total / Spessore totale

0,55 mm

Wear layer / Couche d'usure  
Nutzschicht / Slijtlaag  
Capa de desgaste / Strato di usura

471 x 915 mm

Dimensions / Dimensions / Abmessungen  
Afmetingen / Dimensiones / Dimensioni



**COREtec**<sup>®</sup>  
*the Original*

SWEETNESS + SASS

WHAT'S IN  
YOUR CORE?

**EVEREST**

50-LVTE-1901

4 V-GROOVE

P. 6

**DOLOMITE**

50-LVTE-1902

4 V-GROOVE

P. 8

**THABOR**

50-LVTE-1903

4 V-GROOVE

P. 10

**VENTOUX**

50-LVTE-1904

4 V-GROOVE

P. 12

**MATTERHORN**

50-LVTE-1905

4 V-GROOVE

P. 14

**CANYON**

50-LVTE-1906

4 V-GROOVE

P. 16

**JURA**

50-LVTE-1907

4 V-GROOVE

P. 18

**SIERRA**

50-LVTE-1908

4 V-GROOVE

P. 20

**SAVOIE**

50-LVTE-1909

4 V-GROOVE

P. 22

**VESUVIUS**

50-LVTE-1910

4 V-GROOVE

P. 24



100% Waterproof

100% résistant à l'eau / 100% Wasserfest / 100% Watervast  
100% resistente al agua / 100% resistente all'acqua



Will not expand or contract

Extrêmement stable / Extrem stabil / Extrem stabil  
No se expande ni se contrae / Non dilata o restringe



Pet proof

Adapté aux animaux domestiques / Geeignet für Haustiere



Reduces noise

Reduces noise / Silencieux / Schalldämmend / Akoestisch dempend  
Reduce el ruido / Riduce il rumore



Easy to install

Pose facile / Einfache Verlegung / Plaatst eenvoudig  
Fácil de instalar / Facile da installare



Superior scratch resistance

Résistant aux rayures / Hohe Kratzfestigkeit / Hoge krasweerstand  
Alta resistencia a la abrasión / Elevata resistenza ai graffi



Installation on any surface

Compatible toutes surfaces / Sofort auf bestehende Hartböden / Op elke ondergrond  
Instalación en cualquier superficie / Può essere installato su ogni superficie esistente



No acclimatization necessary

Pas besoin d'acclimatation / Keine Akklimatisierung benötigt / Geen acclimatisatie nodig  
No necesita aclimatación / Non necessita di acclimatazione



Suitable for underfloor heating & cooling

Compatible sur sol chauffant & refroidissant / Geeignet für Bodenheizung & Kühlung  
Ideaal voor vloerverwarming & koeling / Adecuado para calefacción por suelo radiante  
y refrigeración / Adatto a riscaldamento a pavimento e raffreddamento



Electrostatic performance

Accumulation de charges électrostatiques / Antistatisch / Electrostatiche  
propensiteit / Rendimiento electroestático / Performance elettrostatica



**MEGA  
STONE**  
COLLECTION  
BY CORTec®

# EVEREST

50-LVTE-1901

4√-GROOVE



**MEGA  
STONE**  
COLLECTION  
BY COSTEC



**DOLOMITE**

50-LVTE-1902

4 V-GROOVE





**MEGA  
STONE**  
COLLECTION  
BY COREtec

**THABOR**

50-LVTE-1903

4 -GROOVE



**MEGA  
STONE**  
COLLECTION  
BY COREtec®

**VENTOUX**

50-LVTE-1904

4 -GROOVE



**MEGA  
STONE**  
COLLECTION  
BY CORTEC

# MATTERHORN

50-LVTE-1905

4  GROOVE



**MEGA  
STONE**  
COLLECTION  
BY COREtec®



**CANYON**

50-LVTE-1906

4 -GROOVE



**MEGA  
STONE**  
COLLECTION  
BY CORTtec

**JURA**  
50-LVTE-1907  
4√-GROOVE



**MEGA  
STONE**  
COLLECTION  
BY COREtec®



**SIERRA**

50-LVTE-1908

4 V-GROOVE





**MEGA  
STONE**  
COLLECTION  
BY COREtec®

**SAVOIE**  
50-LVTE-1909  
4  **GROOVE**





**VESUVIUS**  
50-LVTE-1910  
4 V-GROOVE

# Technical specs



**8,00 mm**  
(EN ISO 24346)

Total thickness / Epaisseur totale / Gesamtstärke  
Totale dikte / Espesor total / Spessore totale



**471 x 915 mm**

Dimensions / Dimensions / Abmessungen  
Afmetingen / Dimensiones / Dimensioni



**0,55 mm**  
(EN ISO 24340)

Wear layer / Couche d'usure / Nutzschrift  
Slijtlaag / Capa de desgaste / Strato di usura



**6 pcs / 2,59 m<sup>2</sup>**  
**21,80 kg**

Per Box / Par Boîte / Pro Karton / Per Doos  
Por caja / Per scatola

Level of use | Classe d'usage | Nutzungsklasse | Gebruiksklasse | Clasificación de uso | Classe d'uso  
**33 - 42 (EN ISO 10874)**

Inflammability | Classement feu | Brandverhalten | Brandklasse | Resistencia al fuego | Classe di resistenza al fuoco  
**B<sub>n</sub>-S1 (EN 13501)**

Scratch resistance | Résistance aux rayures | Verschleissverhalten | Kravsttheid | Resistencia a la abrasión | Resistenza ai graffi  
**Class T (EN 660-2)**

Squareness and straightness | Rectitude des arrêtes et de l'équerrage | Massstabilität | Rechtheid en rechthoekigheid | Cuadratura y rectitud | Dilatazione  
**< 0,15mm (EN 24342)**

Curling when exposed to heat | Incurvation après exposition à la chaleur | Schüsselung | Krulling onder invloed van warmte | Encorbamiento después de exposición al calor | Incurvamento massimo  
**< 0,02mm (EN 23999)**

Dimensional Stability | Stabilité dimensionnelle | Dimensionsstabilität | Dimensionele stabiliteit | Estabilidad dimensional | Stabilità dimensionale  
**< 0,02mm (EN 23999)**

Electrostatic Performance | Accumulation de charges électrostatiques | Antistatik | Electrostatische propensiteit | Rendimiento electrostático | Performance elettrostatica  
**< 2 kV (EN1815)**

Slip resistance | Glissance | Rutschhemmung | Antislip | Coeficiente de fricción | Coefficiente dinamico di attrito  
**DS (EN 13893)**

Slip restraint | Résistance au glissement | Rutschhemmung | Slipweerstand | Restricción al resbalamiento | Coeficiente di scivolosità  
**R10 (DIN51130)**

Formaldehyde group | Classe formaldehyde | Formaldehyd Klassifizierung | Formaldehydeklasse | Grupo formaldehído | Classe Formaldeide  
**E1 (EN 717-1)**

Acoustic Insulation | Efficacité Acoustique | Trittschallverbesserungsmaß | Kontaktgeluidisolatie | Aislamiento acústico | Isolamento acustico  
**ΔLw = 19dB (EN 140)**

Castor Chair resistance | Résistance aux chaises à roulettes | Stuhlrollenbeanspruchung | Bestand tegen stoelwielen | Resistencia a sillas con ruedas | Prova con sedia a ruote  
**Pass (EN425)**

Light fastness | Résistance à la lumière | Lichtechtheit | Lichtechtheid | Solidez del color a luz artificial | Resistenza alla luce  
**8 (ISO 105-B02)**

Heat insulation | Isolation thermique | Wärmedurchlasswiderstand | Thermische isolatie | Aislamiento térmico | Isolamento al calore  
**0,1009 (m<sup>2</sup> K/W) (EN 12667 ISO 8302)**

Underfloor heating | Chauffage par le sol | Bodenheizung | Vloerverwarming | Calefacción por suelo radiante | Riscaldamento a pavimento  
**Suitable | Adapté | Geeignet | Geschikt | Adecuado | Adatto (EN 12524)**

Resistance to chemicals | Résistance aux produits chimiques | Chemikalienbeständigkeit | Chemicalienresistente  
Resistencia a los productos químicos | Resistenza ai prodotti chimici

**Very good | Très bon | Sehr gut | Zeer goed | Muy bueno | Molto buono (EN 423)**

Residual indentation certified | Poinçonnement rémanent certifié | Eindrückverhalten bescheinigt | Restdruk gecertificeerd  
Huella residual | Indentazione residua certificata

**0,04 mm (EN ISO 24343-1:2012)**



Warranty (year) | Garantie (ans) | Garantie (Jahre) | Garantie (jaar) | Garantía (años) | Garanzia (anni)

**Lifetime Residential | 10 Commercial**

The warranty covers manufacturing defects and premature wear in the event of normal use.


La garantie couvre les vices de fabrication et l'usure précoce en usage normal.

Die Garantie deckt Herstellungsfehler und vorzeitigem Verschleiß bei normaler Nutzung.

De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik.

La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.

La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.



# Installation



1



2



3



4



5



6



7



8



9



10



# MEGA STONE COLLECTION

BY CORETEC

BY

 **US FLOORS**<sup>®</sup>

Manufacturer of Unique and Sustainable Floors

A DIVISION OF

 **Shaw**

[info@usfloors.be](mailto:info@usfloors.be) • [www.coretecfloors.eu](http://www.coretecfloors.eu)